

Technical Data

Guard

Product No.

- 2SHC-DOM-SH-WIDE
- 2SHC-DOM-SH-SLIM
- 2SHC-DOM-SHC-WIDE
- 2SHC-DOM-SHC-SLIM
- 2SHC-DOM-SH-WIDE-IP66
- 2SHC-DOM-SH-SLIM-IP66
- 2SHC-DOM-SH-DS-SLIM
- 2SHC-DOM-SH-DS-WIDE

Notice: Each product must be configured before ordering.

Integrated with



Guard Versions:



Guard Slimline
Width: 40 mm

Guard Wideline
Width: 56 mm

- Length: 253.0 mm
- Height: 20.0 mm
- 11.5 mm
- Outside cover, without handle
- Inside cover, without handle

Guard Compact Versions:



Guard Compact Slimline
Width: 40 mm

Guard Compact Wideline
Width: 56 mm

- Length: 133.0 mm
- 72.0 mm
- 56.0 mm
- Height: 20.0 mm
- 11.5 mm
- 8.0 mm
- Outside covers and inside cover Slimline, without cylinder rose
- Cylinder rose Slimline
- Cylinder and handle rose Wideline
- Outside cover, without handle
- Inside handle covers, without handle
- Cylinder roses

Locking cylinder:

- Interaxis dimension: Guard: Between 55 and 94 mm
- Guard Compact: ≥ 64 mm (Slimline)
- ≥ 56 mm (Wideline)
- Hole for Swiss round cylinders, holes for other cylinder profiles on request
- Blind version without cylinder hole available

Application:

- Suitable for doors with high frequency of use, subject to frequent violent usage
- Category of use: grade 4 according to EN 16867 (PIV test report no. 57-4/19)

Backset:

- Slimline versions (width of escutcheon 40 mm):
For backset < 25 mm the application has to be checked
- Wideline versions (width of escutcheon 56 mm):
For backset < 35 mm the application has to be checked

Technical Data

Guard

Integrated with



Installation:

Different installation types

- Screwing through the door from the inside
- Screw-on installation

- Door leaf thickness 36-106 mm, increment in 10 mm steps

Fixation points:

- Adjustable by vertically movable threaded sleeves or screws

- Guard:


- Upper fixation point:	min. 65.0 mm	max. 84.0 mm
- Middle fixation point:	min. 21.5 mm	max. 25.0 mm
- Lower fixation point:	min. 112.0 mm	max. 139.0 mm

- Guard Compact:

- Upper fixation point:	min. 65.0 mm	max. 84.0 mm
- Middle fixation point:		21.5 mm
- Wideline:	Horizontal distance of fixation points	38.0 mm
- Slimline:	Vertical distance of fixation points	50.0 mm

 Adapter plate for threads with 50 mm distance available

Handle types:

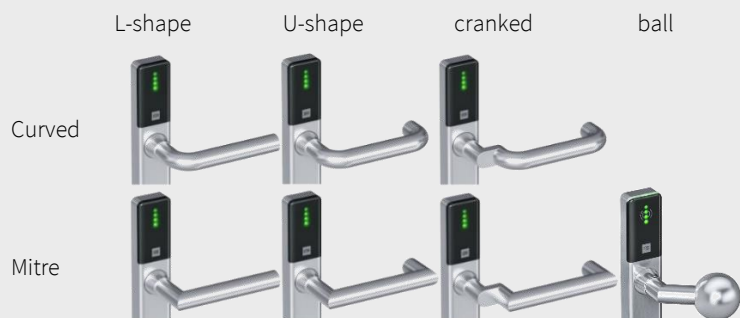

- Handle can be adjusted to DIN-L/DIN-R doors on site

Handle spindle:

- 9 mm (with adapters 7 / 8 / 8.5 / 10 mm are possible)

Handle movement:

- Maximum angle: 45°, upward handle movement possible
- Rest position can be corrected by $\pm 7^\circ$

Surface and colours:

- All visible metal parts: satin stainless steel
- Plastic cover:

signal white	(similar RAL 9003, not for Tapkey)
graphite grey	(similar RAL 7024, not for Tapkey)
jet black	(similar RAL 9005)

Signalling:

- Optical signalling by 4 multicolour LEDs (moving light effect)
- Additional acoustic signalling (can be disabled)

Durability:

- ≥ 200.000 cycles (grade 7 of EN 16867, PIV test report no. 57-4/19)

Power supply:

- 2 pcs. Lithium AAA cells, 1.5 Volts
- Recommended battery: Energizer Ultimate Lithium
- Correct operation is not guaranteed for other battery types

Technical Data

Guard

Integrated with



Environmental influences:

- Temperature: -25°C to +65°C
- Relative humidity: 20% to 99%, no condensation
- Anticorrosive according to DIN EN 1670 class 3 (salt spray test, 96 hours), grade 3 according to EN 1906
- Protection class: IP 54 (PIV test report no. 44-7/19)
- Not suitable for permanent outdoor use
- Environmental resistance according to grade 4 of EN 16867 (PIV test report no. 57-4/19)

Battery life time and data preservation:

- At room temperature (+20°C) for ENiQ / ELS / Tapkey Guard S:
- Up to 70.000 / 50.000 / 25.000 looking cycles or
 - Up to 3 / 4 / 1.5 years stand-by time in case of non-use
 - Up to 2.5 / 3.5 / 1 year(s) in case of approx. 10 looking cycles per day
- Intelligent battery management:
- Multilevel temperature compensated battery warning system
 - 10 year data preservation without battery

Approvals and certifications:

- Technical approval (abZ) granted by DIBt (German technical authority)
- abZ approval no. Z-6.100-2554
 - Suitable for the usage in single- and double-leaf fire and smoke control doors made of wood, aluminium and steel
 - Suitable for the usage in escape and emergency routes
- Suitable for doors in escape in panic routes
- Tested as emergency exit device for escape routes according to EN 179, test report 123000167.01/02 of MPA NRW (Germany)
 - Classification according to EN 179:2008: 3-7-7-B-1-3-5-2-A-B
 - Suitable for use on fire resistance and smoke controlled doors, grade B according to EN 16867 (PIV test report no. 57-4/19)
 - Hardware performance sheet (HPS) for building hardware according to EN 16035 (ift no. 20-001125-PR01 / KB-G10-UZ05)

Programming, Transponders, RFID and RF interfaces:

- For ENiQ Guard, ELS Guard and Tapkey Guard:
Access control functions in line with ENiQ, ELS and Tapkey portfolio

Classification according to EN 16867 (PIV test report no. 57-4/19):

digit	1 Category of use	2 Durability	3 Door mass	4 Fire & smoke doors	5 Safety	6 Environmental resistance	7 Credential related security	8 Security: Attack resistance	9 Security: Related to EN1906
grade	4	7	-	B	1	4	B/C/D ¹⁾	0	0
1) Credential related security:			Grade D for ENiQ Guard and Tapkey Guard Grade C for ELS Guard (Hitag S), grade B for ELS Guard with Hitag 1 or 2						



All data correspond to the actual development status